

Advanced Materials**Araldite® CW 9029 / Aradur® HW 9029 System**

UL® RECOGNIZED POLYMERIC SYSTEM AT 200 °C

GENERAL :

Araldite® CW 9029 with Aradur® HW 9029 system is a liquid, hot curing two-component epoxy casting systems containing mechanically reinforcing fillers. This system is readily processed into a resilient polymer having excellent mechanical and electrical characteristics. The cured product exhibits exceptional resistance to thermal cycling as well as thermal endurance properties, which qualifies for 200 °C service.

This system is recommended for the manufacture of electrically insulating components and for use as electrical insulation for indoor medium and high voltage applications including SF₆ insulated types.

APPLICATIONS :

- Components are easily processed liquids
- Adequate working life at processing temperatures
- Rapid gelation at mold temperatures of 140 °C and above
- Excellent mechanical and electrical properties
- Excellent fracture toughness characteristics
- Excellent performance in applications requiring thermal cycling
- UL® recognized insulation component with Thermal index of 200 °C

TYPICAL PROPERTIES* :**Araldite® CW 9029***

Appearance	Blue Viscous Liquid
Specific Gravity	1.71 – 1.79
Viscosity, cPs	
@ 25 °C	60,000 – 80,000
@ 50 °C	4,000 – 8,000
@ 60 °C	1,450 – 2,500
@ 70 °C	1,000 – 1,500
Flash point, Closed Cup, °C	135

* Both Blue and clear versions are available

Aradur® HW 9029

Appearance	Beige Viscous Liquid
Specific Gravity	1.88 – 1.96
Viscosity, cPs	
@ 25 °C	6,000 – 10,000
@ 50 °C	1,500 – 2,500
@ 60 °C	900 – 1,800
@ 70 °C	600 – 1,200
Flash point, Closed Cup, °C	140

Mixed

Specific Gravity	1.81 – 1.85
Viscosity, cPs	
@ 25 °C	25,000 – 35,000
@ 50 °C	2,500 – 3,500
@ 70 °C	700 – 1,200

* Typical properties are based on Huntsman's test methods. Copies are available upon request.

PACKAGING & STORAGE :

Araldite® CW 9029 : Contains cure-accelerating additives. It should not be stored for long periods at temperature in excess of 30 °C nor should it be exposed to temperatures in excess of 100 °C for more than 2 hours. Incorrect handling will result in an increase in viscosity and reduced cured-state properties.

Aradur® HW 9029 : Contains cure accelerators. Storage at elevated temperatures (> 80 °C) for long periods (> 5 days) will result in an undesirable increase in viscosity and impaired reactivity of the mixed system. This hardener is sensitive to moisture. Partially used containers should be closed immediately after use.

Under these conditions their shelf lives will be one year from date of shipping. Contact Customer Service for packaging information.

MIX RATIO :

	Parts by weight	Parts by volume
Araldite® CW 9029	100	100
Aradur® HW 9029	100	90

PROCESSING DATA :

Mixed viscosity @ 25 °C, cPs	50,000 – 70,000
Gel time, 10 g sample, min @ 120 °C	29 – 35
Recommended cure time, hours	
@ 80 °C	5 +
@ 140 °C	10

PROCESSING AND CURE :

Araldite® CW 9029 and Aradur® HW 9029 system is ideally suited to processing by conventional techniques. When casting very large parts with this system, an extended cure cycle is recommended to reduce formulation of high stresses within the cured part. The optimum gelation and cure schedule in this case is dependent on the design of the part. General processing conditions are given below :

Smaller parts :

For relatively thin, low mass castings, a simplified cure schedule would be : within preheated mold at 80 °C – 100 °C, mix materials at 40 °C – 80 °C. Fill mold, then gel typically for 4 – 6 hours at 80 °C or 2 hours at 100 °C. Then post cure either 2 hours at 140 °C, or 10 hours at 130 °C.

Very large parts :


Within preheated mold and mixed materials at 60 °C – 80 °C, cure with either a step or ramp cure cycle. For example, ramp cure from initial mold temperature to 140 °C in linear ramp over a time of 16 – 24 hours. Then post cure for an additional 4 hours at 140 °C. Cool slowly to 100 °C or less over a period of several hours prior to de-molding.

This system is ideally suited to processing by the Automatic Pressure Gelation (APG) technique. However, it can be used to produce small sized castings by conventional means as above. In using the APG process, preheat mold to 140 °C – 160 °C. Fill the mold in 2 – 5 minutes with the mixed material at approximately 60 °C. Gel within mold under pressure of 1 – 3 atm for 7 – 15 minutes (dependent on part size and mixed material temperature). Then post cure for either 2 hours at 150 °C, 6 hours at 140 °C, or 10 hours at 130 °C.

PROCESSING GUIDES :

When using the Araldite® CW 9029 / Aradur® HW 9029 system to produce large parts by conventional vacuum casting techniques the resin and hardener components, as well as the prepared mold, are typically preheated separately at 60 °C - 80 °C. The casting components are mixed thoroughly for approximately 30 minutes under vacuum of 2 – 6 torr, then brought to atmospheric pressure.

An effective method for eliminating air entrapment in the casting is to place the preheated mold in a vacuum chamber at 4 – 8 torr vacuum. The mixed and de-aired casting system is introduced into the mold while it is within the vacuum environment. The filled mold is then placed in an oven for cure and post cure. When using this system by the APG process, the resin and hardener components are typically preheated to 50 °C – 60 °C. If using continuous metering/mixing/dispensing equipment, the components are typically maintained in a de-aired condition at 50 °C – 60 °C. The prepared mold is preheated on the APG clamping machine to 140 °C – 160 °C.

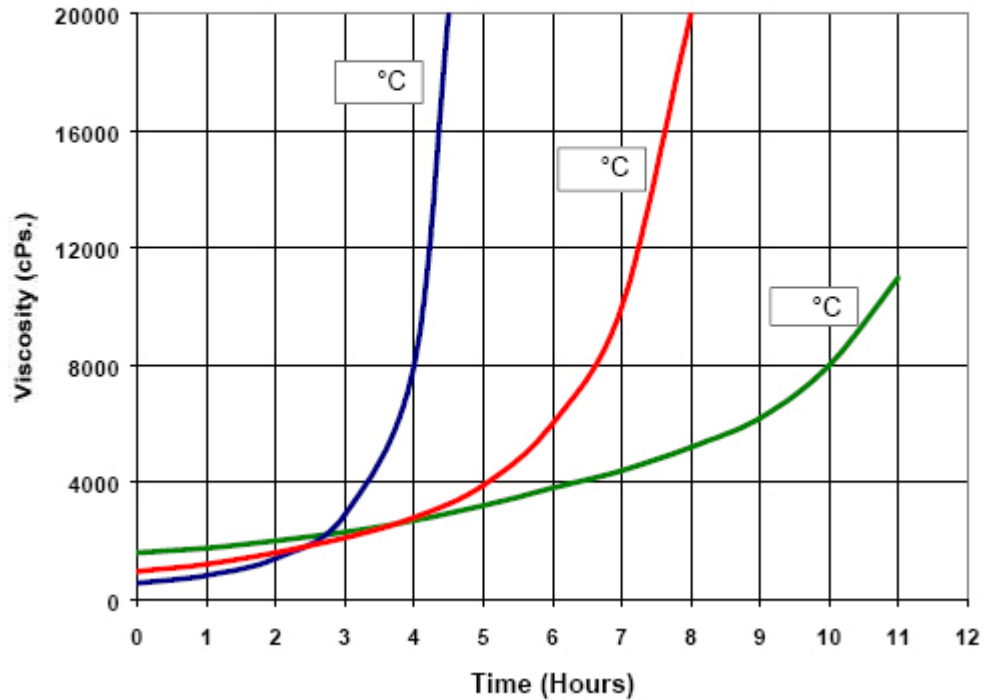REACTIVITY CHARACTERISTICS :**Sunshine gel time, 120 °C (10 grams) :** 29 – 35 minutes**Viscosity vs. Time, Brookfield HATDV, spindle 28 0 100 rpm****Figure 1****Viscosity vs. Time**

MECHANICAL AND PHYSICAL PROPERTIES :

Tensile strength, psi	11,000 – 12,500
Tensile modulus, psi	1.50 – 1.55 x 10 ⁶
Flexural strength, psi	18,000 – 19,000
Flexural modulus, psi	1.35 – 1.45 x 10 ⁶
Hardness, Shore D	92 - 96
Glass transition temperature, °C	110 – 120
Coefficient of thermal expansion, in/in-°C	See Figure 2
Water absorption, 24 hours @ 23 °C, %	0.020 – 0.025
Thermal Conductivity, W/m-K	0.7 – 0.8

ELECTRICAL PROPERTIES : (Typical values)

Dissipation factor, 60 Hz	See Figure 3
Volume resistivity	See Figure 4
Dielectric constant, 60 Hz	See Figure 5
Dielectric strength, V/mil @ 3 mm	420 – 480
Thermal endurance	See Figures 6 & 7

Figure 2

Coefficient of Thermal Expansion

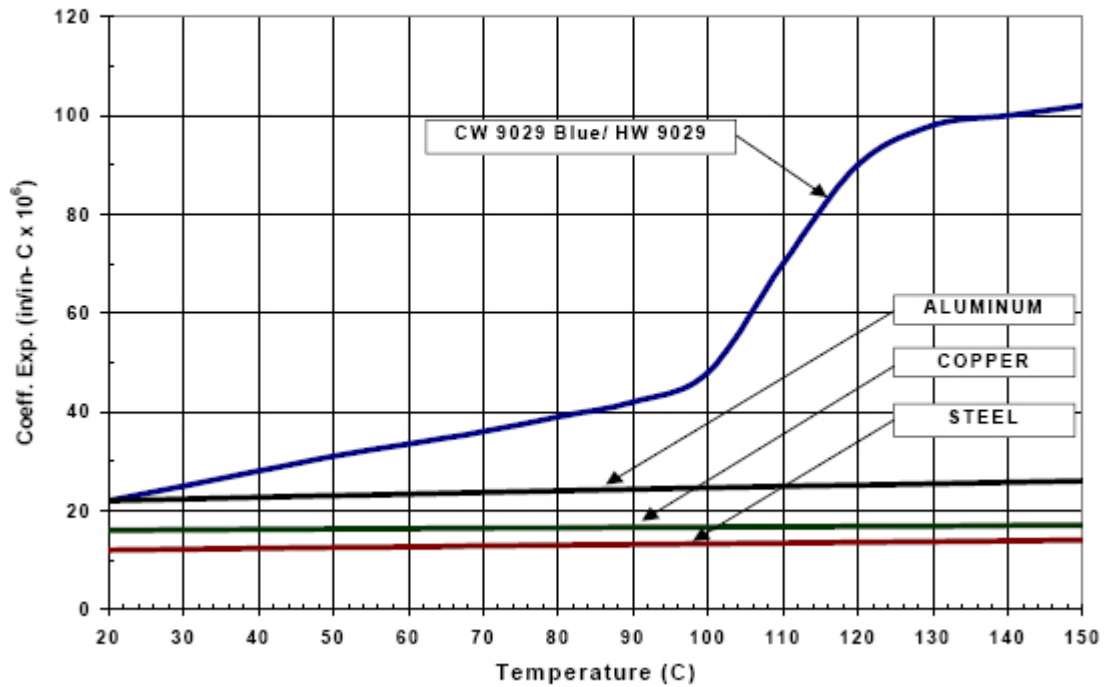


Figure 3

Dissipation Factor vs. Temperature @ 60 Hz

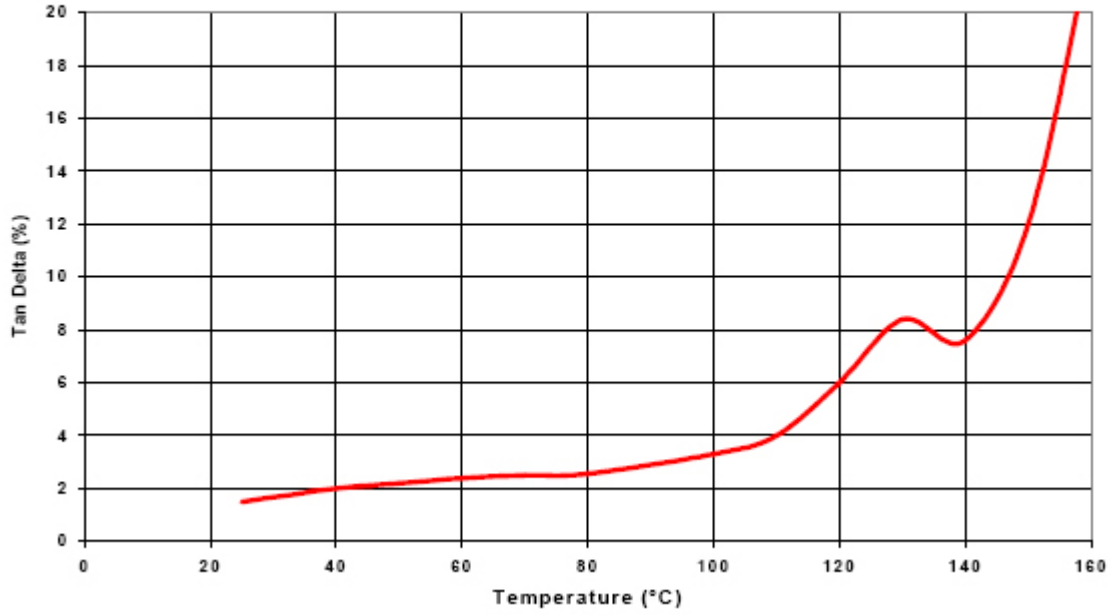


Figure 4

Volume Resistivity vs. Temperature

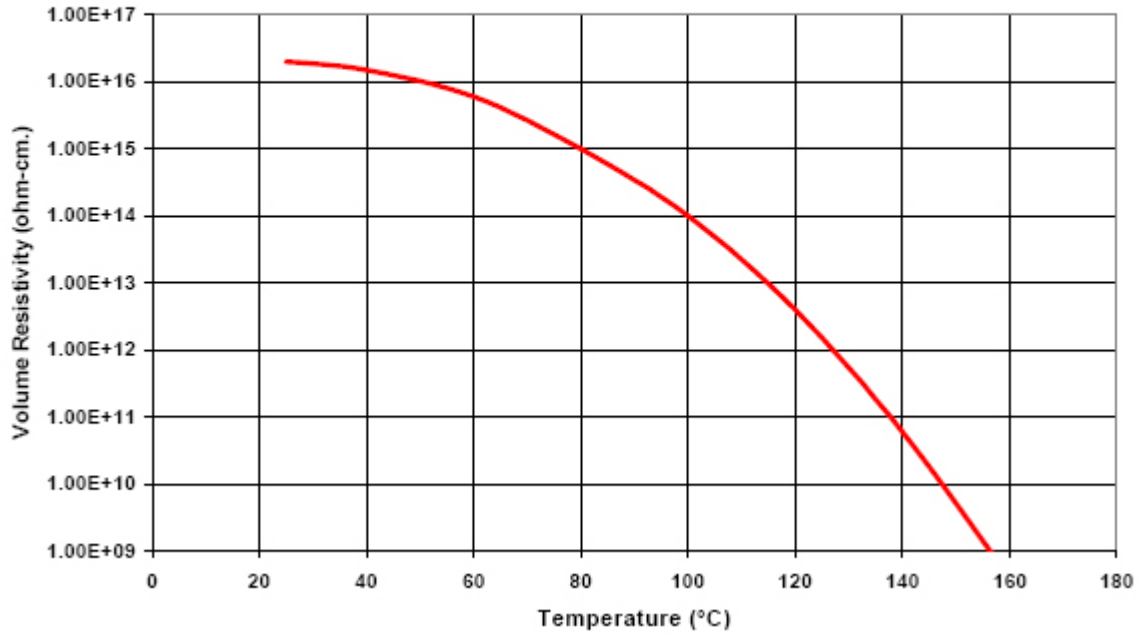


Figure 5

Dielectric Constant vs. Temperature @ 60 Hz

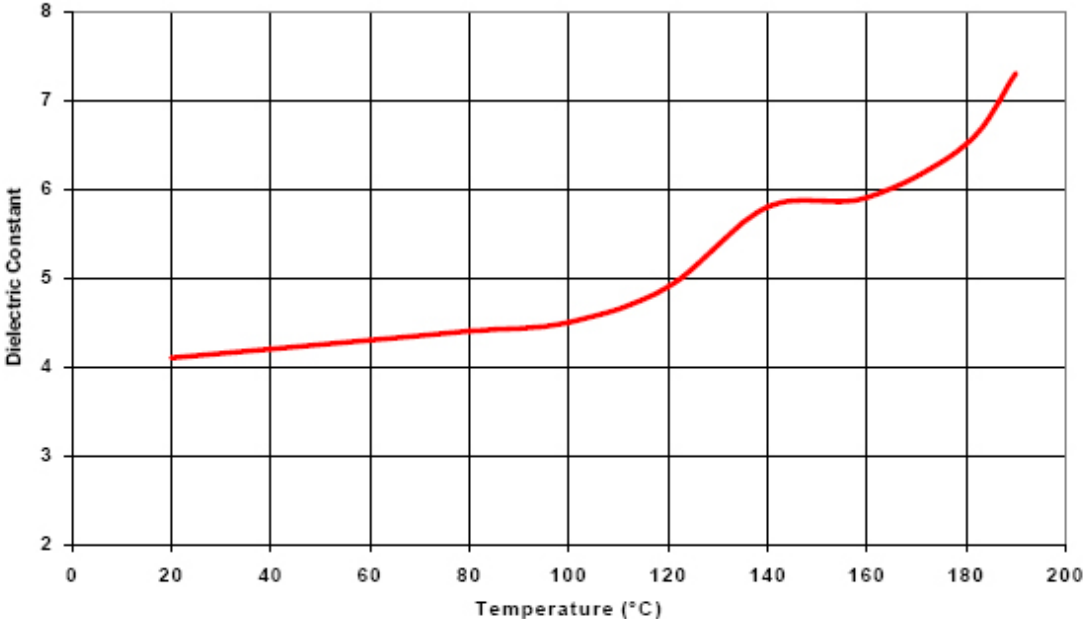


Figure 6

Thermal Endurance


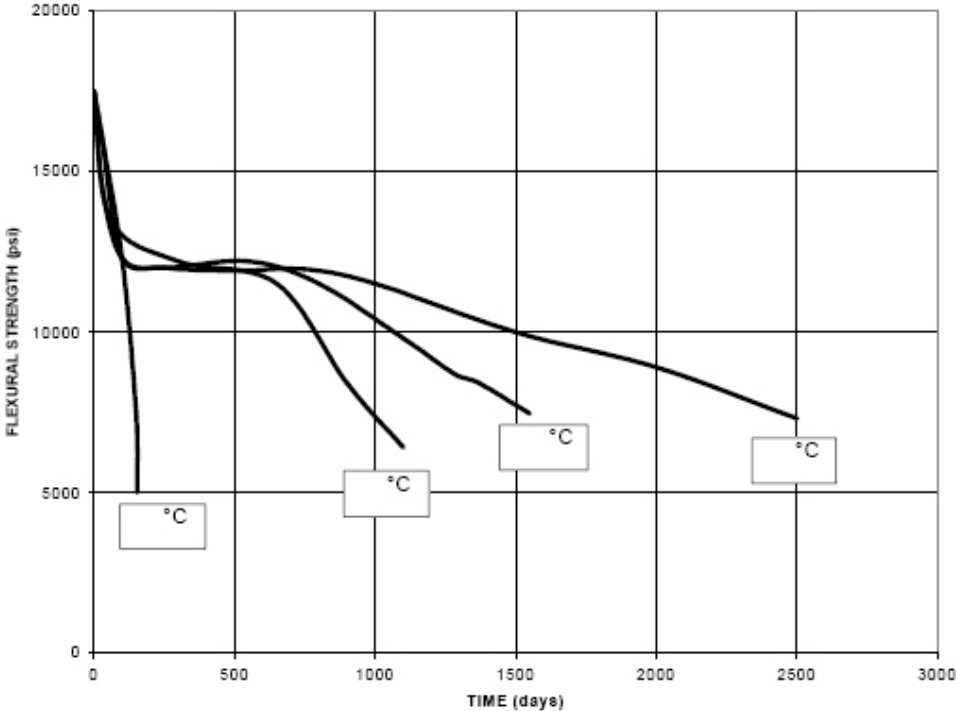


Figure 7

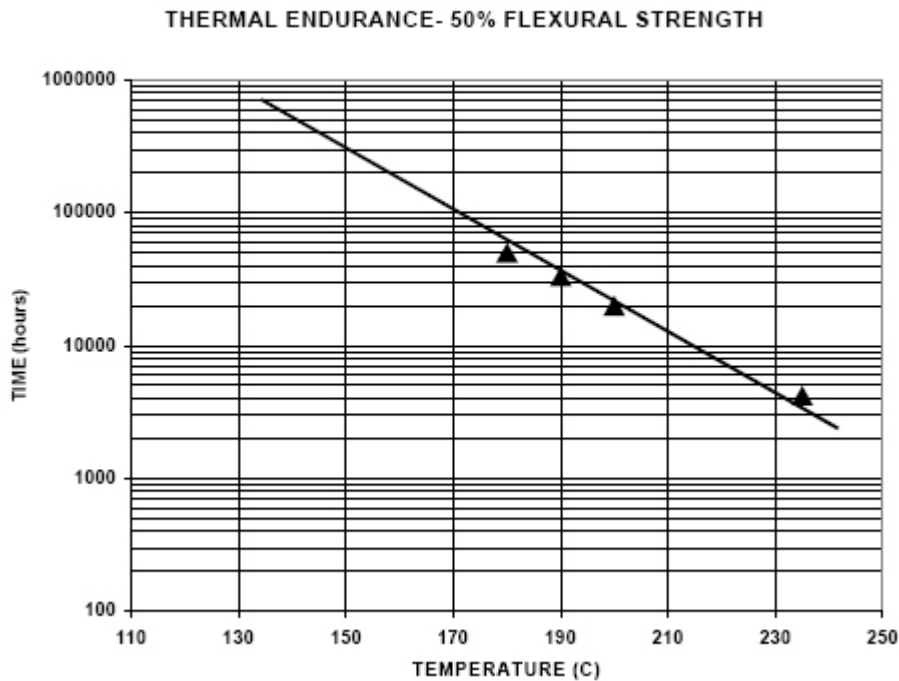

HANDLING/SAFETY PRECAUTIONS :**Araldite® CW 9029**

Warning Causes skin and eye irritation. May cause allergic skin reaction. Avoid contact with eyes, skin, and clothing. Avoid prolonged or repeated contact with skin. Do not breathe dust. Wash thoroughly after handling.

Aradur® HW 9029

Warning Causes eye, skin, and respiratory irritation. May cause allergic skin and respiratory reactions. Avoid contact with eyes, skin, and clothing. Avoid breathing vapor or mist. Avoid prolonged or repeated contact with skin. Keep container closed. Use with adequate ventilation. Wash thoroughly after handling.

Caution To protect against any potential health risks presented by our products, the use of proper personal protective equipment (PPE) is recommended. Eye and skin protection is normally advised.

Respiratory protection may be needed if mechanical ventilation is not available or is insufficient to remove vapors. For detailed PPE recommendations and exposure control options consult the product MSDS or a Huntsman EHS representative.

FIRST AID :

In case of contact :

Eyes : Flush eyes with plenty of water for 15 minutes and get prompt medical attention.

Skin : Wash skin thoroughly with mild soap and water ; remove contaminated clothing before reuse.

Discard contaminated shoes and other articles made of leather.

Inhalation : Remove person to fresh air.

Ingestion : **Do not** induce vomiting. Dilute with plenty of water and contact physician immediately. Never give anything by mouth to an unconscious person.

IMPORTANT LEGAL NOTICE

Huntsman Advanced Materials warrants only that its products meet the specifications agreed with the user. Typical properties, where stated, are to be considered as representative of current production and should not be treated as specifications.

The manufacture of materials is the subject of granted patents and patent applications; freedom to operate patented processes is not implied by this publication.

WHILE ALL THE INFORMATION AND RECOMMENDATIONS IN THIS PUBLICATION ARE, TO THE BEST OF HUNTSMAN ADVANCED MATERIAL'S KNOWLEDGE, INFORMATION AND BELIEF, ACCURATE AT THE DATE OF PUBLICATION, nothing herein is to be construed as a warranty, whether express or implied, including but without limitation, as to merchantability or fitness for a particular purpose. In all cases, it is the responsibility of the user to determine the applicability of such information and recommendations and the suitability of any product for its own particular purpose.

The behavior of the products referred to in this publication in manufacturing processes and their suitability in any given end-use environment are dependent upon various conditions such as chemical compatibility, temperature, and other variables, which are not known to Huntsman Advanced Materials. It is the responsibility of the user to evaluate the manufacturing circumstances and the final product under actual end-use requirements and to adequately advise and warn purchasers and users thereof.

Products may be toxic and require special precautions in handling. The user should obtain Safety Data Sheets from Huntsman Advanced Materials containing detailed information on toxicity, together with proper shipping, handling and storage procedures, and should comply with all applicable safety and environmental standards.

Hazards, toxicity and behavior of the products may differ when used with other materials and are dependent on manufacturing circumstances or other processes. Such hazards, toxicity and behavior should be determined by the user and made known to handlers, processors and end users.

Except where explicitly agreed otherwise, the sale of products referred to in this publication is subject to the general terms and conditions of sale of Huntsman Advanced Materials LLC or of its affiliated companies including without limitation, Huntsman Advanced Materials (Europe) BVBA, Huntsman Advanced Materials Americas Inc., and Huntsman Advanced Materials (Hong Kong) Ltd.

Huntsman Advanced Materials is an international business unit of Huntsman Corporation. Huntsman Advanced Materials trades through Huntsman affiliated companies in different countries including but not limited to Huntsman Advanced Materials LLC in the USA and Huntsman Advanced Materials (Europe) BVBA in Europe.

Araldite and Aradur are registered trademarks of Huntsman Corporation or an affiliate thereof in one or more, but not all, countries.

Copyright © 2007 Huntsman Corporation or an affiliate thereof. All rights reserved.

Main Offices :

Huntsman Corporation
10003 Woodloch Forest Dr.
The Woodlands
Texas 77380
(281) 719-6000

**Huntsman Advanced Technology
Center**

8600 Gosling Rd.
The Woodlands
Texas 77381
(281) 719-7400

Website :

www.huntsman.com/advanced_materials